

## IFC Heated Parts Withstand High Process Temperatures

Watlow's new IFC (Interference Fit Construction) heated parts are ideal for applications that require materials other than aluminum or exceed the temperature capabilities of cast aluminum. With FEA (Finite Element Analysis), or if time permits, by an iterative prototyping process, uniformity levels equaling  $\pm 1$  percent of the operating temperature have been achieved. IFC heated parts use the same design logic as cast-in heaters to achieve temperature uniformity. Some important aspects that determine temperature uniformity performance are the material used, the physical shape of the part, the heater placement within the part, and the special shaped groove that is machined into the part to accept a cable or tubular heater. IFC allows the heated part to be customized to meet many specific customer needs over a wide variety of shapes and sizes.

In the past when temperature requirements have exceeded 450°C, engineers turned to milled groove or brazed assemblies. One of the advantages of the IFC heated part over the milled groove approach or the brazed assembly, is the improved heater life due to the intimate contact of the heater, therefore reducing hot spots. To optimize temperature uniformity and to eliminate the time-consuming iterative prototyping process Watlow offers FEA, which will optimize the design and allow an accurate prediction of the temperature uniformity that can be expected for a specific part.

IFC heated parts may be customized to meet specific customer needs including a multitude of machined shapes, terminations and coating, plus special cleaning. Since Watlow's IFC heated parts are a finished product, no assembly is required. All joints of the IFC heated part can be welded to make it vacuum-tight for use, even in the highest vacuum process levels. Watlow provides strong engineering support from concept through production, quick prototyping and wide range of design parameters.

IFC heated parts are manufactured by Watlow's ISO 9001 registered facility in Batavia, Illinois.

### Available materials

- Stainless steel
- Nickel
- Inconel®
- Aluminum
- Copper
- Bronze



### Features and Benefits

#### Wide range of shapes and sizes

- Allows custom parts to meet specific customer needs

#### Superior thermal transfer between heater and substrate

- Excellent temperature uniformity
- Improved heater life

#### Single piece construction

- Eliminates the need to assemble several components (no brazing required)

#### Vacuum compatible

- Very low contamination (no outgassing)

#### High operating temperatures

- Greater than 450°C (depending on materials used and flatness requirements, consult factory for details)

Inconel® is a registered trademark of the Inco family of companies.



1310 Kingsland Drive  
Batavia, Illinois 60510 USA  
Phone: 630-879-2696  
FAX: 630-879-1101  
Internet: [www.watlow.com](http://www.watlow.com)  
e-mail: [info@watlow.com](mailto:info@watlow.com)




BAT-IFC-60



## IFC Performance Data

IFC heaters improve thermal performance of a heated part by optimizing thermal transfer from heater sheath to the substrate. Testing was performed on two identical platens. One with the heater installed with the IFC method and the other using a typical milled groove construction. The test demonstrated the delta that exists between the heater sheath temperature and the platen substrate temperature at different watt densities. Both heaters were powered simultaneously and allowed to ramp to the set point of 350°C at 120 volts and then again to 500°C at 220 volts.

The delta value of the IFC was only 30-40°C while the delta of the milled groove part concluded with +80°C at 20 W/in<sup>2</sup>. This is even more significant at 67.5 W/in<sup>2</sup> with the IFC delta value at a 150-160°C rating while at +270°C for the milled groove part. The graph to the right illustrates the test results.

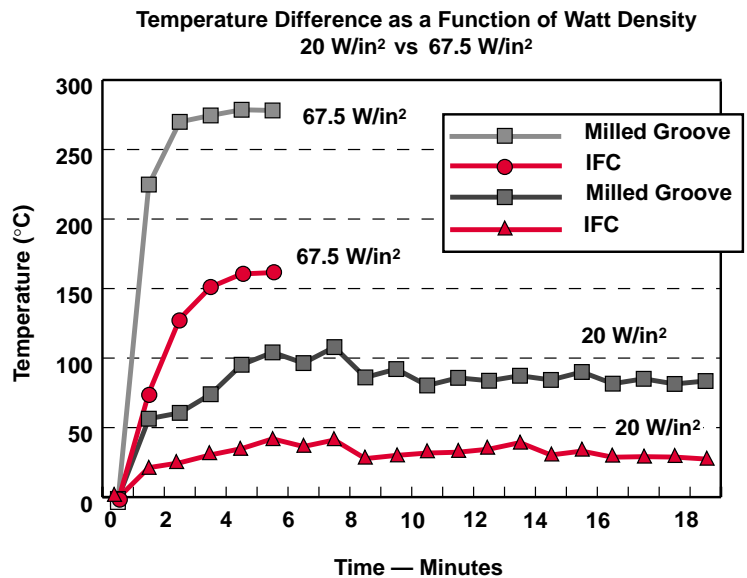


## IFC Section View

IFC heaters have a proprietary-shaped groove machined into the part that accepts a tubular or cable heater. The heater is pressed into the groove and achieves heat transfer similar to that of a cast-in design. This method increases heater life when compared to the milled groove approach. The tight contact fit of heater within the machined groove reduces sheath hot spots that could result in heater burnout.

### Materials:

Stainless steel  
Nickel  
Inconel®  
Aluminum  
Copper  
Bronze

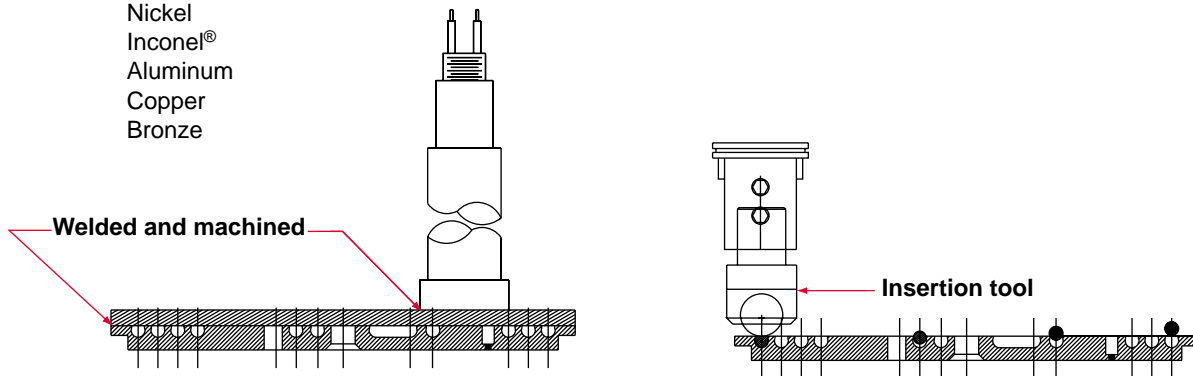

**United States Sales Offices:** Atlanta/Greenville, (770)908-9164 • Austin, (512)249-1900 • Charlotte/Columbia, (704)541-3896 • Chicago, (847)458-1500 • Cincinnati, (513)398-5500 • Cleveland, (330)467-1423 • Dallas, (972)620-6030 • Denver, (303)798-7778 • Detroit, (248)651-0500 • Houston, (281)440-3074 • Indianapolis, (317)575-8932 • Kansas City, (913)897-3973 • Los Angeles, (714)935-2999 • Maryland/Virginia, (410)840-8034 • Minneapolis, (612)431-5700 • Nashville, (615)264-6148 • New England, (603)882-1330 • New York/New Jersey/Philadelphia, (215)345-8130 • New York, Upstate, (716)438-0454 • Orlando, (407)351-0737 • Phoenix, (602)708-1995 • Pittsburgh, (412)322-5004 • Portland, (503)245-9037 • St. Louis, (314)878-4600 • Sacramento, (707)425-1155 • San Diego, (760)728-9188 • San Francisco, (408)980-9355 • Seattle, (425)222-4090 • Tampa/St. Petersburg, (813)926-3600 • Tulsa, (918)496-2826 • Winston Salem/Raleigh, (336)766-9659 • Wisconsin, (414)723-5990

**Asian Sales Offices:** Australia, +61 (3) 9335-6449 • China, +86 (21) 6229-8917 • Japan, +81 (03) 5403-4688 • Korea, +82 (02) 563-5777 • Malaysia, +60 (4) 641-5977 • Singapore, +65 777-5488 • Taiwan, +886 (0) 7-261-8397 **European Sales Offices:** France, +33 (01) 3073-2425 • Germany, +49 (0) 7253-9400-0 • Italy, +39 (02) 458-8841 • United Kingdom, +44 (0) 115-964-0777

**Latin American Sales Office:** Mexico, +52 (42) 17-6235

**For other product information, call Watlow's FAX REPLY:** United States +1 (800) 367-0430 • Outside the United States +1 (732) 885-6344